

OS Super Lock L.S.D.




*Experience the Difference
with our Differentials!*




OS Super Lock L.S.D

The OS Super Lock LSD instantly reacts and transitions smoothly from both free and locked positions, thus combining advantages of a normal differential's drivability and a race limited slip differential's performance and stability.

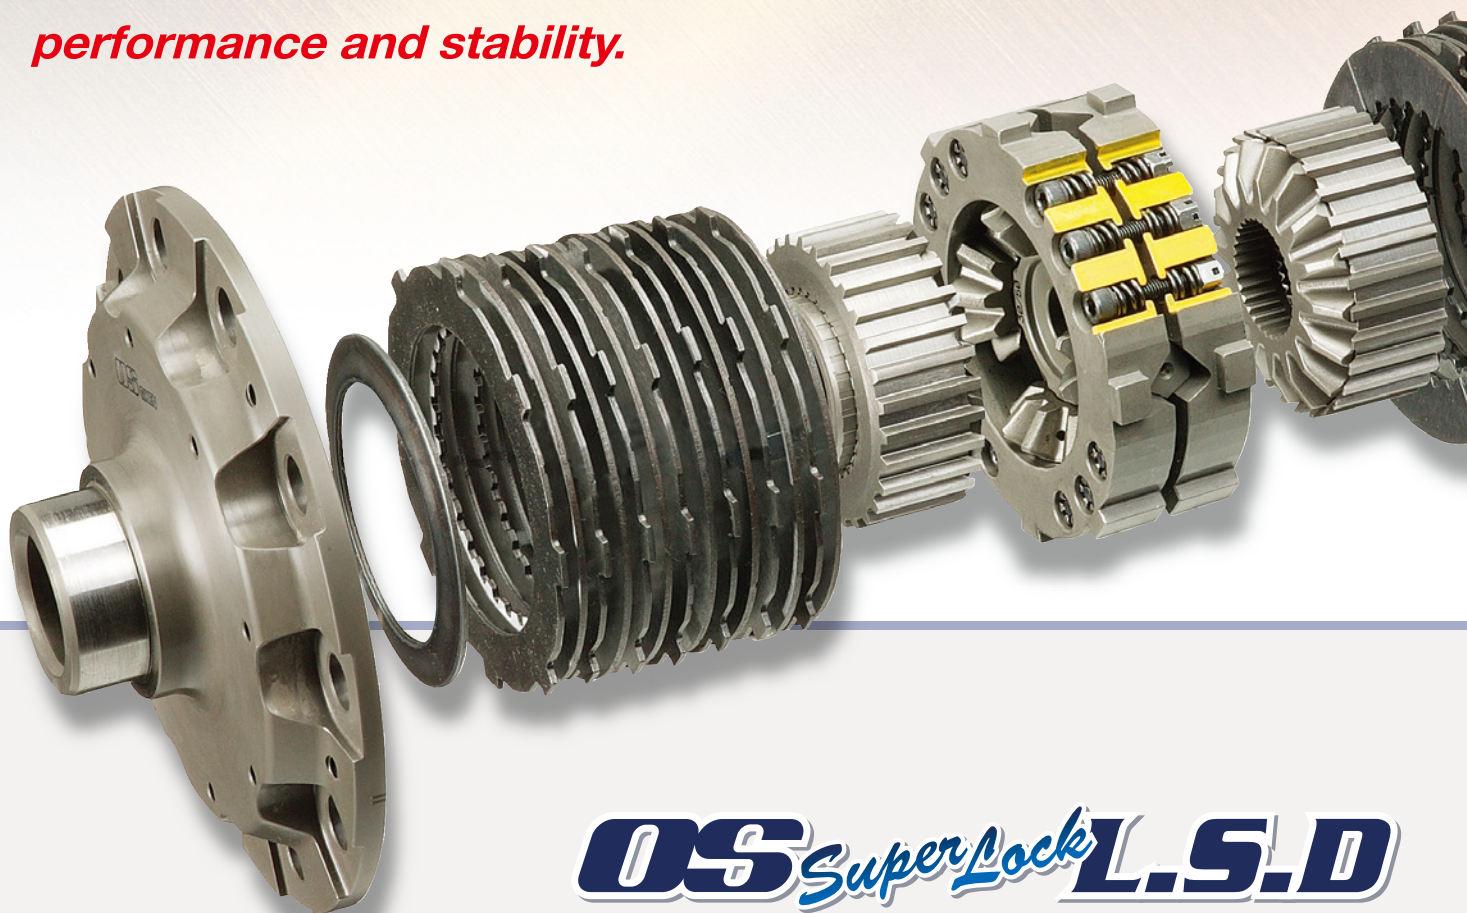

OS Super Lock L.S.D


OS Giken Secrets

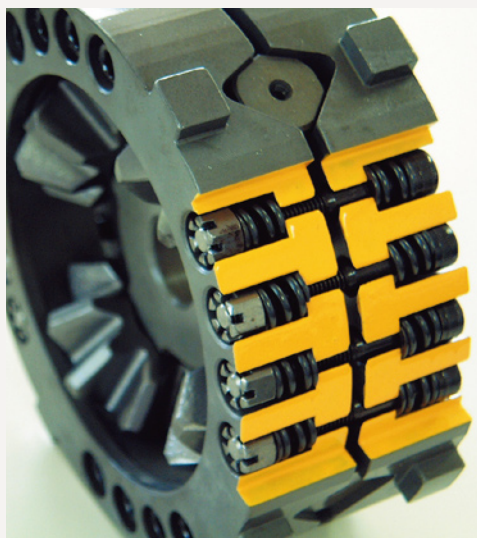

1. OS Giken's Revolutionary and Patented Lock Timing Technology

Under normal driving conditions, our OS Super Lock LSD operates with the smoothness of a normal differential. Once full power is applied, it transforms into a 100% locking LSD. Thanks to our patented design, our Super Lock LSDs are able to perform this transformation with such unparalleled smoothness, the transition occurs virtually unnoticed. In addition, our design also enables the Super Lock LSDs to be extremely responsive to throttle input and smoothly lock or loosen accordingly.

(Patent earned in USA, Japan, Taiwan, and Korea)

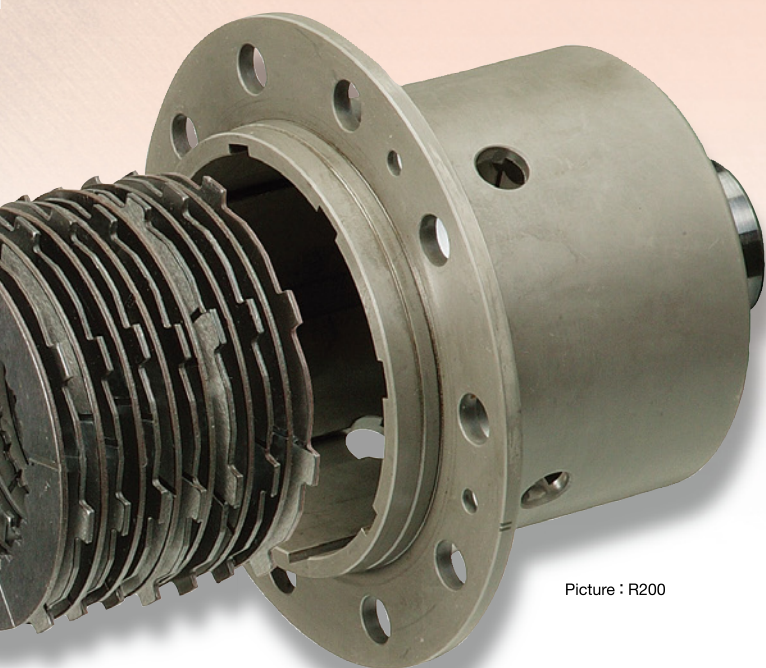

Picture : R200



Known for its renowned racing engine design and engineering expertise in parts development since the 1970's, OS Giken utilized its accumulated knowledge and engineering experience to develop its own limited slip differential. Four years of extensive research and development lead to a new and revolutionary LSD design. Whether it be a day of shopping or a day out on the race circuit, the OS Super Lock LSDs easily adapts to any style of driving, thus contradicting the conventional perception that a mechanical limited slip differential is for professional race use only.



2. Truly 100% Lock Capable.


Some of the determining factors of an LSD's quality and capability are the number of friction plates and their diameter (total surface area). The OS Super Lock LSD design miniaturizes the bevel gears and pinion gears, creating more space inside the differential case to maximize disk capacity and diameter. As a result, our design enables 1.5 to 2 times more friction plates compared to other more conventional mechanical limited slip differential designs. Utilizing our own forging technology, our internal gears have incredible durability and strength. Our innovative designs and original technologies have enabled us to create a true 100% locking LSD.

(Patent earned in USA, Japan. Patent Pending in China, Taiwan, and Korea)

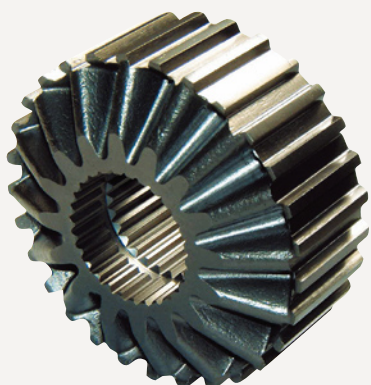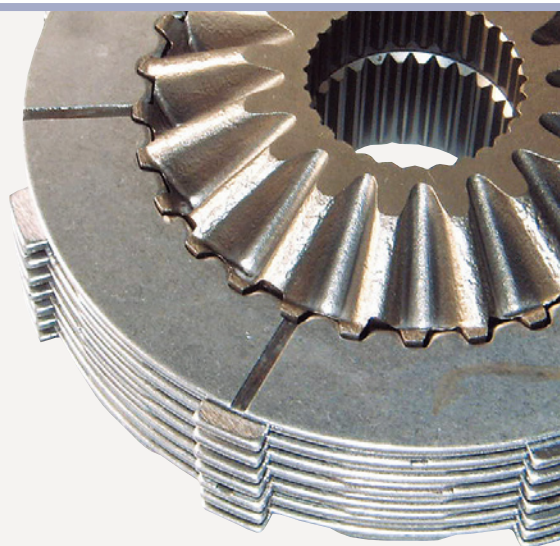

3. High performance and durability results in a new dimension = OS Giken advantage.

OS Giken has designed a differential to be smooth at low speeds, yet able to 100% lock completely during high loads. In addition, our exact engineering and precision machining assures our LSD's internal components precisely fit and function as one complete unit, thus reducing temperature and most incurred wear during operation. OS Giken Super Lock LSDs have unparalleled durability and longevity.

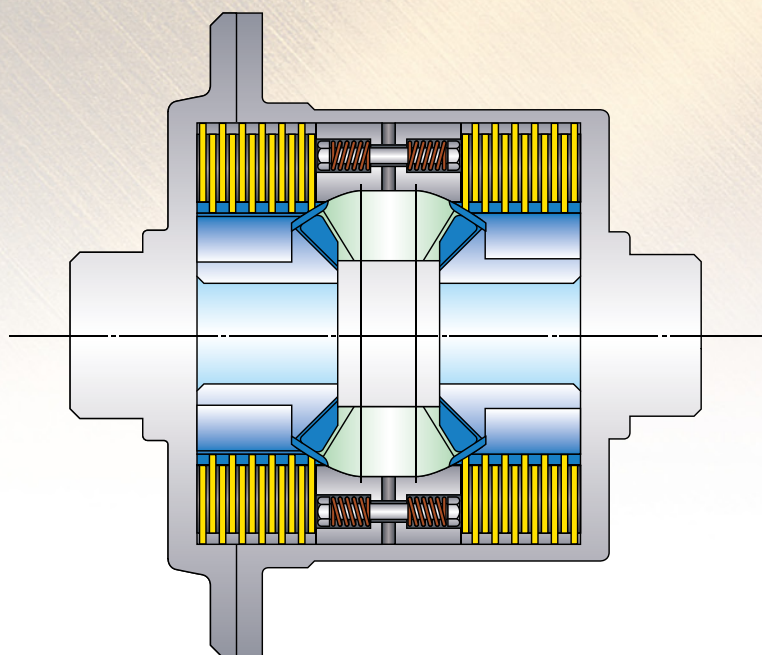

Unlocked initial torque condition



Advantages of an OS Giken

- **A true 100% locking LSD :** No movement of internal parts means less heat is generated while in operation and less wear of the friction disks. Less initial torque loss and incredible longevity and durability can be realized.

* We have tested our LSD for 35,000km and there was no wear or loss of performance.

- **Proven Durability and Reliability :** No drop in performance or loss of initial torque, even during long and stressful endurance races.

* During the Altezza(IS300)Single Make Race in Japan, an OS Giken equipped Altezza ran a total of 3 seasons totaling 23 races and never had to change or rebuild its LSD. Even now, this unit only requires regular inspection service only.


- **Straight line stability :** During a drag race, our LSD will lock 100% and provide torque equally to each powered wheel. Stable and straight runs will result thus eliminating torque steer in FF applications and lower the chance of drive-shaft breakage.
- **Customizable:** Lock timing can be customized by adjusting the spring inside the pressure ring. Tune the LSD to custom fit any specification and set-up of your desired vehicle and driving style/skill level for optimum performance. **(SPEC-X Only)**
- **By using a pressure control ring,** the LSD responds smoothly to the application of initial torque. Lock engagement is smooth and the impact vibration is significantly reduced. This increases the stability of the vehicle and allows more freedom for the driver to trace the desired racing line.
- **On snow tracks and regions with unstable road conditions,** our OS Super Lock LSD easily adapts and adjusts tire rotation to increase vehicle stability. Bad weather and harsh road conditions are not a problem when the vehicle is equipped with an OS Super Lock LSD.

Super Lock LSD

OTH

& Lock

L D

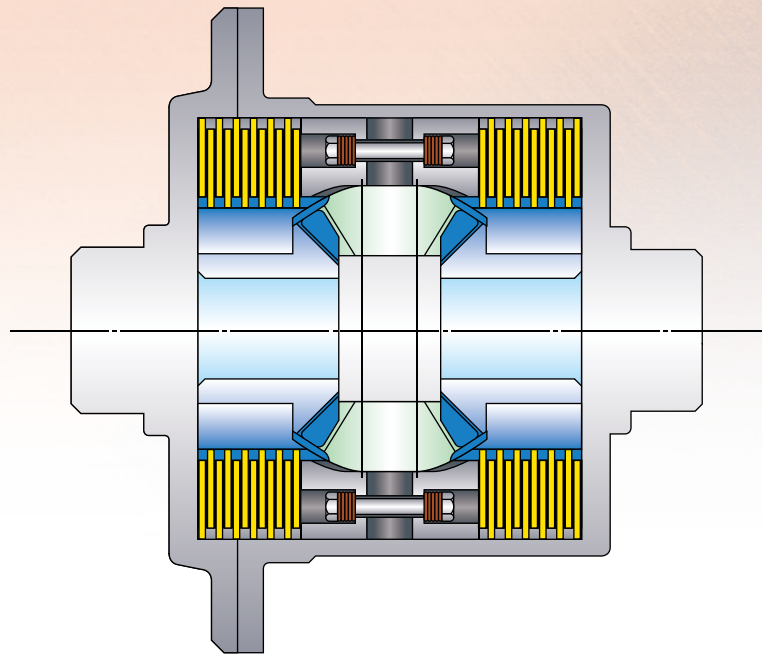

100% locked condition

Giken Super Lock LSD

- **Less under-steer during cornering :** When entering into a corner with the throttle closed, the spring inside the pressure control ring will react accordingly and immediately return the differential's internal components to the original initial torque settings and thus create less under-steer. With a conventional differential, however, there will be a lapse of time before returning to the initial torque settings, as it takes time for the cone springs to react and make contact with the friction disk in order to close the pressure ring.
- **When exiting from a corner, our LSD's transition to the full 100% lock position is smooth and predictable.** This gives the vehicle better traction and stability, resulting in better lap times while racing.
- **OS Giken Super Lock LSDs do not require any break-in process.** The unit is comprised of parts that have been precisely machine to exact specifications and are ready for use upon installation.



Picture : Integra (Honda DC5) One Make Race
2002 West Japan Series Champion
Driver : T.Kogame



Picture : Integra

PRODUCTS LIST

NISSAN

Model	Model No.	Engine	M/T	Year Notes	SPEC-S	Extended
Skyline	HCR32	RB20DET	●	'89/5thru'93/7	D-NA202061405-S	*1
	ECR33	RB25DET	●	'93/8thru'98/5	D-NA202061405-S	Not for ABS & Active LSD *1
	ER34		●	'98/5thru'00/8	D-NA402061405-S	Not for Active LSD *1
	BNR32	RB26DETT	●	'89/8thru'93/1	D-NA302061405-S	For Rear *2
			●	'93/1thru'94/12	D-NA302061405-S	No Additional OS Giken Parts Required for Installation
	BCNR33		●	'95/1thru'98/12	D-NA302061405-S	Not for rear active LSD
	BNR34		●	'99/1thru'02/2	D-NA302061405-S	Not for rear active LSD
	V35	VQ35DE	●	'03/1on	D-NB102061405-S	Viscous Only
180SX	RPS13	SR20DET	●	'91/1thru'96/11	D-NA202061405-S	*1
			●	'96/12thru'98/12	D-NA202061405-S	*1
Silvia	PS13	SR20DET	●	'91/1thru'93/10	D-NA102061405-S	*1
	S14		●	'93/11thru'96/11	D-NA202061405-S	*1
			●	'96/12thru'98/12	D-NA202061405-S	*1
	S15		●	'99/1thru'02/1	D-NA402061405-S	No Additional OS Giken Parts Required for Installation
Fairlady	Z33	VQ35DE	●	'02/8on	D-NB102061405-S	*1
	Z34	VQ37VHR	●	'08/12on	D-NB102061405-S	Viscous Only
Cedric	Y34	VQ30DET	—	—	D-NA402051605-S	No Additional OS Giken Parts Required for Installation

TOYOTA

Model	Model No.	Engine	M/T	Year Notes	SPEC-S	Extended
MarkII & Chaser	JZX90	1JZGTE	●	'92/10thru'96/8	D-TC102061405-S	*1
			—	'92/10thru'96/8	D-TC102061405-S	*1
	JZX100		●	'96/9thru'00/4	D-TC102061405-S	*1
			—	'96/9thru'00/4	D-TC102061405-S	*1
	JZX110		●	'00/10thru'04/4	D-TC102061405-S	*1
Supra	JZA70	1JZGTE	●	'90/8thru'93/5	D-TC102061405-S	*1
	JZA80	2JZGE	—	'93/5thru'96/5	D-TD102061405-S	'93/5 to '96/6 except '93/5 to '96/5 6spd; *1
		2JZGTE	—	'93/5thru'96/5	D-TD102061405-S	
			●	'93/5thru'96/5	D-TG102061405-S	*1
Soarer	JZZ30,31	1JZGTE	—	'91/6thru'96/8	D-TD102061405-S	*1
		2JZGE	—	'91/6thru'96/8	D-TD102061405-S	*1
	UZZ30	1UZFE	—	'91/6thru'96/8	D-TD102061405-S	*1
Aristo	UZS143	1UZFE	—	'91/10thru'96/7	D-TD102051605-S	*1
	JZS147	2JZGE	—	'92/10thru'96/7	D-TD102051605-S	*1
		2JZGTE	—	'92/10thru'96/7	D-TD102051605-S	*1
	JZS160,161	2JZGE	—	'97/8thru'04/4	D-TD102051605-S	*1
		2JZGTE	—	'97/8thru'04/4	D-TD102051605-S	*1
Levin, Trueno	AE86(1st style)	4AG	●	'83/5thru'85/9	D-TA202081604-S	No Additional OS Giken Parts Required for Installation
	AE86(2st style)		●	'85/10thru'87/4	D-TA102081604-S	No Additional OS Giken Parts Required for Installation
Altezza	SXE10	3SG	●	'98/10thru'04/4	D-TB102081404-S	No Additional OS Giken Parts Required for Installation
MarkX	DBA-GRX120	4G-RFSE	—	—	D-TC102061405-S	For Open Differential
Vitz	NCP13/NCP91	1NZ-FE	●	'00/10on	D-TI101081402-S	No Additional OS Giken Parts Required for Installation

OS Giken Super Lock L.S.D **SPEC-S** 1.5WAY (FF is Limited 1.1WAY)

While our LSDs are ideal for use in sports driving, racing, auto-cross, and quarter mile applications, we also are proud to say that they are considered to be some of the most quiet and easy to drive LSDs available. Our OS Super Lock LSDs are more than suitable for use in your daily driver.

OS Giken Super Lock L.S.D **SPEC-X** FULL ORDER TYPE

The Type X version is available in 1.1way, 1.5way, and 2way types with customizable cam angles, lock timing, initial torque settings. For a Type X LSD tuned to best suit your driving style and vehicle, please contact the nearest Authorized OS Giken Distributor.

MAZDA

Model	Model No.	Engine	M/T	Year Notes	SPEC-S	Extended
RX-7	FC3S	13B	●	'85/9thru'91/10	D-MA102061405-S	*3
	FD3S		●	'91/11thru'02/4	D-MA102061405-S	No Additional OS Giken Parts Required for Installation
RX-8	SE3P	13B-MSP	●	—	D-MA102061405-S	No Additional OS Giken Parts Required for Installation
Unos 1800	NA8	BP	●	—	D-MA202061404-S	No Additional OS Giken Parts Required for Installation *9
	NB8		●	—	D-MA202061404-S	No Additional OS Giken Parts Required for Installation *9
	NCEC	LF-VE	●	—	D-MA302061404-S	No Additional OS Giken Parts Required for Installation *9

HONDA

Model	Model No.	Engine	M/T	Year Notes	SPEC-S	Extended
Civic	EK9	B16B	●	'97/8thru'00/9	D-HB101091401-S	optional final gear *4
	FD2	K20A	●	—	D-HB101091401-S	No Additional OS Giken Parts Required for Installation
Civic type R	EP3	K20A	●	'01/12thru'05/9	D-HC101091401-S	No Additional OS Giken Parts Required for Installation
	FD2		●	'07/3on	D-HC101091401-S	No Additional OS Giken Parts Required for Installation
Accord euro R	CL7	K20A	●	'02/10on	D-HC101091401-S	No Additional OS Giken Parts Required for Installation
Integra	DC2	B18C	●	'93/5thru'01/7	D-HB101091401-S	Type R *5
	DC5	K20A	●	'01/7thru'04/9	D-HC101091401-S	No Additional OS Giken Parts Required for Installation *6
S2000	AP1	F20C	●	'99/4thru'04/4	D-HA102081604-S	No Additional OS Giken Parts Required for Installation
	AP2	F22C	●	—	D-HA102081604-S	No Additional OS Giken Parts Required for Installation
NSX	NA1	C30A	●	—	D-HD102062004-SF	*7
	NA2	C32A	●	—	D-HD102062004-SF	*7
	NA1	C30A	●	—	D-HD102062004-SF4.4-5	*8
	NA2	C32A	●	—	D-HD102062004-SF4.4-6	*8

SUBARU

Model	Model No.	Engine	M/T	Year Notes	SPEC-S	Extended
Impreza	GDB	EJ20T	●	'00/10thru'07/9	D—SUA101081404—S	Front LSD. No Additional OS Giken Parts Required for Installation
			●	'00/10thru'07/9	D—SUB102061404—S	No Additional OS Giken Parts Required for Installation
	GRB		●	'07/10on	D—SUA101081404—S	Front LSD. No Additional OS Giken Parts Required for Installation
			●	'07/10on	D—SUB102061404—S	No Additional OS Giken Parts Required for Installation

OS Giken Note Key:

- *1... Refer to Side Flange Adaptation List #1.(See 9P)
- *2... Exchange with Genuine Nissan side flange pn:38220-12U00×1 and pn:38220-12U01×1.
- *3... For Viscous LSD equipped vehicles, exchange with Genuine Mazda side flange pn:P019-27-270B×2 and snap ring pn:P016-27-421×2. Open differential vehicles need no additional modification.
- *4... Transmission case must be machined to provide clearance. Remove speedometer gear and replace with OS Giken speedometer gear.

- *5... Remove speedometer gear and replace with OS Giken speedometer gear.
- *6... Remove and replace speedometer gear.
- *7... Includes ring gear for normal final gear.
- *8... Includes 4.4 Final Gear Set.
- *9... Not for use with turbo equipped vehicles or 1600cc models.

Please Contact Your Authorized OS Giken Distributor for Further Details.



PRODUCTS LIST

OS TCD OS Super Lock TCD for GT-R **NISSAN**

Model	Model No.	Engine	M/T	Year	SPEC-S	Extended
GT-R	R35	VR38DETT	●	'07/12~	DT-NF105051905-S	No Additional OS Giken Parts Required for Installation

OS NEO OS Super Lock NEO for GT-R **NISSAN**

Model	Model No.	Engine	M/T	Year	SPEC-S	Extended
GT-R	R35	VR38DETT	●	'07/12~	DN-NF105051905-S	No Additional OS Giken Parts Required for Installation

Minivan exclusive use L.S.D. OS Super Lock NEO for HIACE

TOYOTA

Model	Model No.	Year	SPEC-S	Extended
HIACE (REGIUSACE)	100系	1989~2004	ND-TE102051804-S	Drive system FR 4AT/5MT(4WD Excludes)
	200系	2004~2007	ND-TE102051804-S	Drive system FR 4AT/5MT(4WD Excludes)

OS Super Lock L.S.D. Exclusive use Gear Oil



With a high viscosity rating of 250 and low temperature starting characteristics of an 80W, OS-250R was specifically developed to provide maximum performance and smooth comfort for the OS SuperLock L.S.D., which houses many more friction plates compared to other clutch-type L.S.D.'s. Usage of OS-250R with the OS SuperLock L.S.D. is highly recommended.

Model	OS 80W-250 GL-5
S A E	80W-250
A P I	GL-5
Flash point	208°C
Kinematic viscosity	320.5(40°C)
	43.7(100°C)

FULL SYNTHETIC
80W-250
OS Super Lock L.S.D. for FR



1ℓ Can



20ℓ Can

SIDE FLANGE ADAPTATION LIST

No.1 NISSAN	Model	Model No.	Engine	M/T	Year	OE Flange	Flange Replacement
	Skyline	HCR32	RB20DET	●	'89/5to'93/7	For 5 bolt OE Flanges	Genuine Nissan pn:38220-73L01×2
		ECR33	RB25DET	●	'93/8to'98/5		
	180SX	RPS13	SR20DET	●	'91/1to'96/11		
				●	'96/12to'98/12		
	Silvia	PS13	SR20DET	●	'91/1to'93/10	For 6 bolt OE Flanges	Genuine Nissan pn:38220-41F01×2
		S14	SR20DET	●	'93/11to'96/11		
				●	'96/12to'98/12		
	Skyline	ER34	RB25DET	●	'98/5on	For Viscous LSD	38220-0V770(right side)×1 38220-0V771(left side)×1
	Fairlady	Z33	VQ35DE	●	'02/8on	For Viscous LSD equipped vehicles w/long flange	38220-AR011×1
	Skyline	BNR32	RB26DETT	●	'89/8to'93/1 (models before minor change)	If vehicle's spline has 30 ridge	38220-12U00(right side)×1 38220-12U01(left side)×1
	Fairlady	Z34	VQ37VHR	●	'08/12on	For Viscous LSD	*1

*1 Replacement of the longer side flange with a shorter side flange is required.
(both sides should use the short flanges)

No.2 TOYOTA	For vehicles equipped with an open differential, no additional OS Giken parts are required for installation. For vehicles equipped with a Toyota Torsen type LSD, please refer to the chart below.						
	Model	Model No.	Engine	M/T	Year	OE Flange	Flange Replacement
	MarkII Chaser	JZX90	1JZGTE	●	'92/10to'96/8	For vehicles with Torsen LSD	41309-22050×2
				—	'92/10to'96/8		
		JZX100	1JZGTE	●	'96/9on		
				—	'96/9on		
		JZX110	1JZGTE	—	'00/10on		
	Supra	JZA70	1JZGTE	●	'90/8to'93/5		41309-14060×2

No.3 TOYOTA	For vehicles equipped with an open differential, no additional OS Giken parts are required for installation. For vehicles equipped with a Toyota Torsen type LSD, please refer to the chart below.						
	Model	Model No.	Engine	M/T	Year	OE Flange	Flange Replacement
	Supra	JZX80	2JZGE	—	'93/5to'96/5	For vehicles with Torsen LSD	41309-24020×2
			2JZGTE	—	'93/5to'96/5		
	Soarer	JZZ30,31	1JZGTE	—	'91/6to'96/8		
			2JZGE	—	'91/6to'96/8		
		UZZ30	1UZFE	—	'91/6to'96/8		
	Aristo	UZS143	1UZFE	—	'91/10on		
		JZS147	2JZGE	—	'92/10on		
			2JZGTE	—	'92/10on		
		JZS160,161	2JZGE	—	'97/8on		
			2JZGTE	—	'97/8on		

PRODUCTS LIST

BMW 1 series

Model	Year Notes	Type	Engine	T/M	OEM Dif. Type
E87	2004on	116i	N45B16A	AT	Open
		118i	N45B20B		
		120i	N46B20B		
	2005on	130i	N52B30A	AT/MT	Open

BMW 3 series

Model	Year Notes	Type	Engine	T/M	OEM Dif. Type
E30	1984on	M3	S14	MT	Mechanical
E36	1991on	318is	M42.44	AT/MT	Open
		318i	M40.42.44	AT	
		320i	M50.52		
		323i	M50	AT	Open
		325i	M50.52		
		328i	M52		
		M3 B	S50	MT	Mechanical
	1998on	M3 C	S52	MT/SMG	
E46		316t	N42	AT	Open
		318ti	N42	AT/MT	
	1998on	318i.318ci	M43.N42	AT/MT	
		320i	M52/M54	AT	
		323i	M52	AT	Open
		325i	M52/54		
		328i	M52		
	2003on	330i. 330ci	M54	AT	
		330i. 330ci	M54	MT/SMG	Open
	2001on	M3/CSL	S54/S54TU	MT/SMG	BMDL
E90	2005on	320i/323i	N46B20B	AT/MT	Open
	2005on	325i	N52B25A	AT	Open
		330i	N52B30A	AT	
	2006on	335i	N54B30A	AT	Open

BMW 5 series

Model	Year Notes	Type	Engine	T/M	OEM Dif. Type
E34	1990on	525i	M50	AT	Open
		525i	M50		
		530i	M30		
		530i	M60		
		535i		AT	
		M5	3.6&3.8	MT	
E39	1996on	525i	M52.54	AT	Open
		528i	M52		
		530i	M54		
		540i	M62		
		540i		AT	Open
	1999on	M5	S62	MT	Open
E60/61	2003on	525i/530i	M54	AT	Open
		525i/530i	N52	AT	Open
		540i/550i	N62	AT	Open
	2005on	M5/M6	S85B50A	SMG	BMDL



BMW 6 series

Model	Year Notes	Type	Engine	T/M	OEM Dif. Type
E63	2003on	630i	N52B30A	AT	Open
		645i	N62B44A	AT	Open
		650i	N62B48B	AT/SMG	Open

BMW 7 series

Model	Year Notes	Type	Engine	T/M	OEM Dif. Type
E38	1994on	735i		AT	Open
		740i		AT	Open
		750iL			
E65/66	2001on	735i	N62B36A	AT	Open
		745i	N62B44A		
		745Li	N62B44A		
		760Li	N73B60A		

BMW Z3 series

Model	Year Notes	Type	Engine	T/M	OEM Dif. Type
E40	1996on	1.8i/1.9i	M42.44	AT/MT	
	1996on	1.9i	M44	AT/MT	
	1998.4on	1.9i	M44	AT/MT	
	1999.7on	2.0i	206s4	AT	
		2.2i	M52	AT/MT	Mechanical
	1998on	2.8i	M52	AT	
		3.0i	M54		
	1998on	M Roadstar	S50/S52	MT	
	1998on	M Coupe			

BMW Z4 series

Model	Year Notes	Type	Engine	T/M	OEM Dif. Type
E85	2003on	2.2i	M54	AT	Open
		2.5i	M54	AT	Open
	2006on	2.5i	N52B25A	AT	Open
	2003on	3.0i	M54	AT	Open
		3.0i	M54	AT*8	
		3.0i	M54	SMG	Open
	2006on	3.0si	N52B30A	AT	Open
	2006on	M Roadstar	326S4(S54)	MT	BMDL
		M Coupe			

PRODUCTS LIST

CORVETTE C-4


Type	Engine	Year Notes	Shaft
E-CY15B	5B	1990thru1997	Not included

CORVETTE C-5

Type	Engine	Year Notes	Shaft
E-CY25E	5E	1997thru1998	included
GF-CY25E	5E	1999thru2002	included
GH-CY25E	5E	2002thru2004	included

CORVETTE C-6

Type	Engine	Year Notes	Shaft
GH-X245	5G	2005	included
GH-X245A(Z06)	6E	2006	included
ABA-X245	6F	2006on	included
ABA-X245A(Z06)	6E	2007on	included

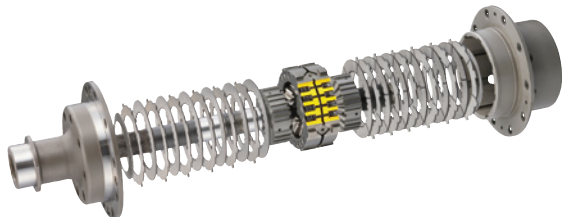

DODGE VIPER


Type	Engine	Year Notes	Shaft
GTS	8M	1999thru2002	included
SRT/10	8M	2003on	included

DODGE *Other available 215 diff. applications:*

Type
CHARGER SRT8
CHALLENGER
MAGNUM

Chrysler *Other available 215 diff. applications:*

Type
300C

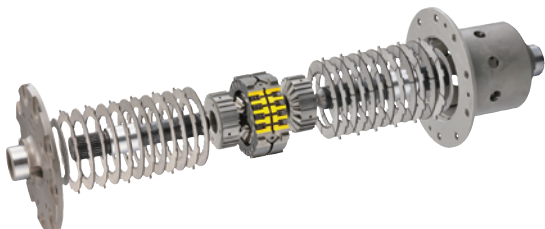

LOTUS ELISE

Type	Engine	Year Notes
STD	18K	1997thru2006
111R	2ZZ-GE	2004thru2006
S	1ZZ-GE	2007
R	2ZZ-GE	2007

LOTUS EXIGE

Type	Engine	Year Notes
S1,340R	18K-VHPD	2000
Exige2	2ZZ-GE	2004thru2006
240R	2ZZ-GE S/C	2005
CUP190	2ZZ-GE	2006
CUP240	2ZZ-GE S/C	2006
S	2ZZ-GE S/C	2006thru2007
Exige	2ZZ-GE	2007
255	2ZZ-GE S/C	2007



MINI COOPER

Model	Type	Year Notes	T/M	Extended
Cooper S(MT1.6)	GH-RE16	2002	6MT	Super charger
Cooper S Convertible(MT1.6)	GH-RH16	2005	6MT	Super charger
Cooper S(MT1.6)	GH-RE16	2005	6MT	Super charger
Cooper S(MT1.6)	GH-RE16	2006	6MT	Super charger
Cooper S Convertible(MT1.6)	GH-RH16	2006	6MT	Super charger
Cooper S(MT1.6)	ABA-MF16S	2007	6MT	Turbo charger



PORSCHE 911/930 series

Displacement	Model	Year Notes	T/M
2.7	CARRERA	1972thru1977	5MT(915)
3	CARRERA 3.0	1972thru1977	5MT(915)
3	911 SC/SCS	1978thru1983	5MT(915)
3.2	911 CARRERA	1984thru1986	5MT(915)
3.0TURBO	TURBO	1975thru1977	4MT(930)
3.3TURBO	930 TURBO	1978thru1982	4MT(930)
3.3TURBO	911 TURBO	1983thru1988	4MT(930)
3.2	911 CARRERA/CS	1987thru1989	5MT(G50)
3.3TURBO	911 TURBO	1989	5MT(G50)
3.2	SPEED STAR	1989	5MT(G50)

PORSCHE 964 series

Displacement	Model	Year Notes	T/M
3.6	911 CARRERA 2	1990thru1993	5MT(G50)
3.6	911 CARRERA RS	1991thru1992	5MT(G50)
3.8	911 CARRERA RS	1993	5MT(G50)
3.3TURBO	911 TURBO 3.3	1991thru1992	5MT(G50)
3.6TURBO	911 TURBO 3.6	1993thru1994	5MT(G50)

PORSCHE 993 series

Displacement	Model	Year Notes	T/M
3.6	911 CARRERA	1994thru1997	5MT(G50)
3.7	911 CARRERA RS	1995thru1996	5MT(G50)
3.6	911 CARRERA S	1997thru1998	5MT(G50)

PORSCHE 996 series

Displacement	Model	Year Notes	T/M
3.6	GT2	2001on	5MT(G50)
3.6	GT3	2000on	5MT(G50)



Attention

The OS SUPER LOCK 4 is a torque-sensing L.S.D.; the differential might not lock if one wheel on one side of the vehicle is in the air. In this case, please apply brakes (foot or e-brake), gradually apply throttle until the diff starts to lock, and then release the brakes. The unit will remain in a locked state as long as throttle is being applied.

SUPER LOCK 4 for 4WDs PRODUCTS LIST

TOYOTA HILUX SURF

Model	Year Notes	Engine	FRONT	REAR	Extended
#N60	1984/5thru1989/4	3Y/2L	□	○	Rigid Suspension Type Application Only for Front
##N130	1989/5thru1995/11	2L/3L/3Y/3VZ	—	○	
##N180	1998/8thru2002/9	1KZ/1KD/3RZ/5VZ	—	○	2WD Application Only
##N185	1998/8thru2002/9	1KZ/1KD/3RZ/5VZ	○	○	
##N210	2002/10on	1KD/3RZ/5VZ/2TR/1GR	—	○	2WD Application Only
##N215	2002/10on	1KD/3RZ/5VZ/2TR/1GR	○	○	

TOYOTA LAND CRUISER

Model	Year Notes	Engine	FRONT	REAR	Extended
##J40	1960/1thru1984/10	B/2B/3B/H/2H	○	○	Full Floating Type Application Only
##J50	1967/4thru1980/7	F/2F	○	○	Full Floating Type Application Only
##J60	1980/8thru1990/1	2F/2H/3B/3F	○	○	Full Floating Type Application Only
##J70	1984/11thru1989/12	3B/13B/1PZ/1HZ	○	○	Full Floating Type Application Only
##J70	1990/1on	3B/13B/1PZ/1HZ	○	○	Full Floating Type Application Only
##J80	1989/10thru1997/12	1HZ/1HD/3F/1FZ	○	○	Full Floating Type Application Only
##J100	1998/1thru2007/6	1HD/2UZ	○	U/D	
##J200	2007/9on	2UZ	U/D	U/D	

TOYOTA FJ CRUISER

Model	Year Notes	Engine	FRONT	REAR	Extended
GSJ10	2006/3on	1GR	—	○	2WD Application Only
GSJ15	2006/3on	1GR	○	○	

TOYOTA LAND CRUISER WAGON / PRADO

Model	Year Notes	Engine	FRONT	REAR	Extended
##J70	1984/11thru1990/3	2L	○	○	
##J70	1990/4thru1996/4	2L/1KZ	○	○	
##J90	1996/5thru2002/9	1KZ/1KD/3RZ/5VZ	○	○	
##J120	2002/10on	1KD/3RZ/5VZ/2TR/1GR	○	○	

NISSAN SAFARI

Model	Year Notes	Engine	FRONT	REAR	Extended
160	1980/6thru1987/10	SD33	—	Ask	
##Y60	1987/11thru1997/9	RD28/TD42/TB42	○	○	
##Y61	1997/10thru2007/6	RD28/ZD30/TD42/TB45/TB48	○	○	

TOYOTA HIACE 4WD

Model	Year Notes	Engine	FRONT	REAR	Extended
100	1989/8thru2004/7	2L/3L/5L/1KZ/1RZ/2RZ/1TR	Ask	Ask	
200	2004/8on	1KD/2KD/1TR/2TR	Ask	Ask	

Attention : The above listed TOYOTA vehicles with a locked diff/spool/diff-lock system are not compatible with the OS SUPER LOCK 4.

Technical Authorized Distributors



OS GIKEN USA

USA

OS Giken USA (Toyota Tsusho America inc.)

1977 w.190th St.,suite 200Torrance, CA 90504, USA

Phone:+1-310-243-1349 Fax:+1-310-516-0858

Email:aftermarket@taiamerica.com

www.osgiken.net



OS GIKEN UK

UK

OS Giken UK(R.B.Motorsport)

Unit C4 Towngate Works Industrial Estate Dark Lane

Mawdesley Lancashire L40 2QU, UK

Phone:+44-1704-822-848 Fax:+44-1704-823-231

Email:rod@rbmotorsport.co.uk

www.osgiken.co.uk



INTRACO
HIGH PERFORMANCE

UAE

UAE Intraco Trading

P.O.Box 5012, Sharjah, U.A.E.

Phone:+971-6-539-5535 Fax:+971-6-539-5545

Email:intracotrading@hotmail.com

www.intracotrading.com

Authorized Distributors



AUSTRALIA

OTOMOTO Pty Ltd

13 Bourke St North Parramatta NSW 2151, Australia

Phone:+61-2-8677-4890 Fax:+61-2-8677-4893

Email:sales@otomoto.com.au

www.otomoto.com.au



SINGAPORE

ST Powered Pte Ltd

No.3 Kim Chuan Lane Singapore 537069 Singapore

Phone:+65-6282-0330 Fax:+65-6287-0320

Email:samueltan@stpowered.com.sg

www.stpowered.com.sg



GREECE

Auto Turbo

101 iera odos street Athens 10447, Greece

Phone:+30-210-341-7987 Fax:+30-210-346-1980

Email:info@autoturbo.gr

www.autoturbo.gr



RUSSIA

RED POINT Tuning Center

Nikitina St. 20 apt. 4 Novosibirsk, 630008 Russia

Phone:+7-383-292-6604 Fax:+7-383-266-5511

Email:alexey@redp.ru

www.redp.ru



ITALY

HT-SOLUTION SRL

Via Lombardia, 9 20060 Vignate-Milano

Phone:+39 02 9566272/+39 338 8410237/

+39 392 9280899 Fax:+39 02 91390819

www.performance4x4.it



Mainland CHINA

FULL THROTTLE MOTORSPORT

Phone:+86 10 69757003 Fax:+86 10 69757002

www.goftm.com

Crazy Racing Motor Sport Co.,Ltd.(HONG KONG)

Phone:+852 2394 7602 Fax:+852 2394 7616

www.crazy-r.com.hk



NEW ZEALAND

OS Giken NZ (Dodson Auto Spares Ltd)

20-22 Poland Road, Glenfield, Auckland New Zealand

Phone:+64-9-441-3152

Email:sales@osgiken.co.nz

www.osgiken.co.nz



TAIWAN

AAI MOTORSPORTS CO.

Phone:+886 2 82263988 Fax:+886 2 82262696

MAXPOWER RACING Co.,Ltd.

Phone:+886 2288 29818 Fax:+886 2288 30886



OS SUPER LOCK L.S.D.

Your Authorized OS Dealer:

OS Racing Power Unit & Parts Development
GIKEN Co., Ltd.

464 Okimoto, Naka-ku, Okayama JAPAN 702-8001

TEL +81-86-277-6609 FAX +81-86-277-8115

WEB <http://www.osgiken.co.jp/>

*This catalogue is subject to change without notice.

*Pictures of the products in this catalogue may look different due to printing limitation.